


# Vent Hole Treatment Options



- 1. Open:** As it implies, the 5/8" diameter vent hole remains open to allow full access to the part interior.
- 2. Patched:** The vent hole is permanently sealed with a round welded white plastic "patch". This will not allow any atmospheric pressure changes.
- 3. Welded Threaded Fitting with Removeable Stainless Hex Plug:** This option allows you to equalize barometric pressure and insert ballast into the interior.

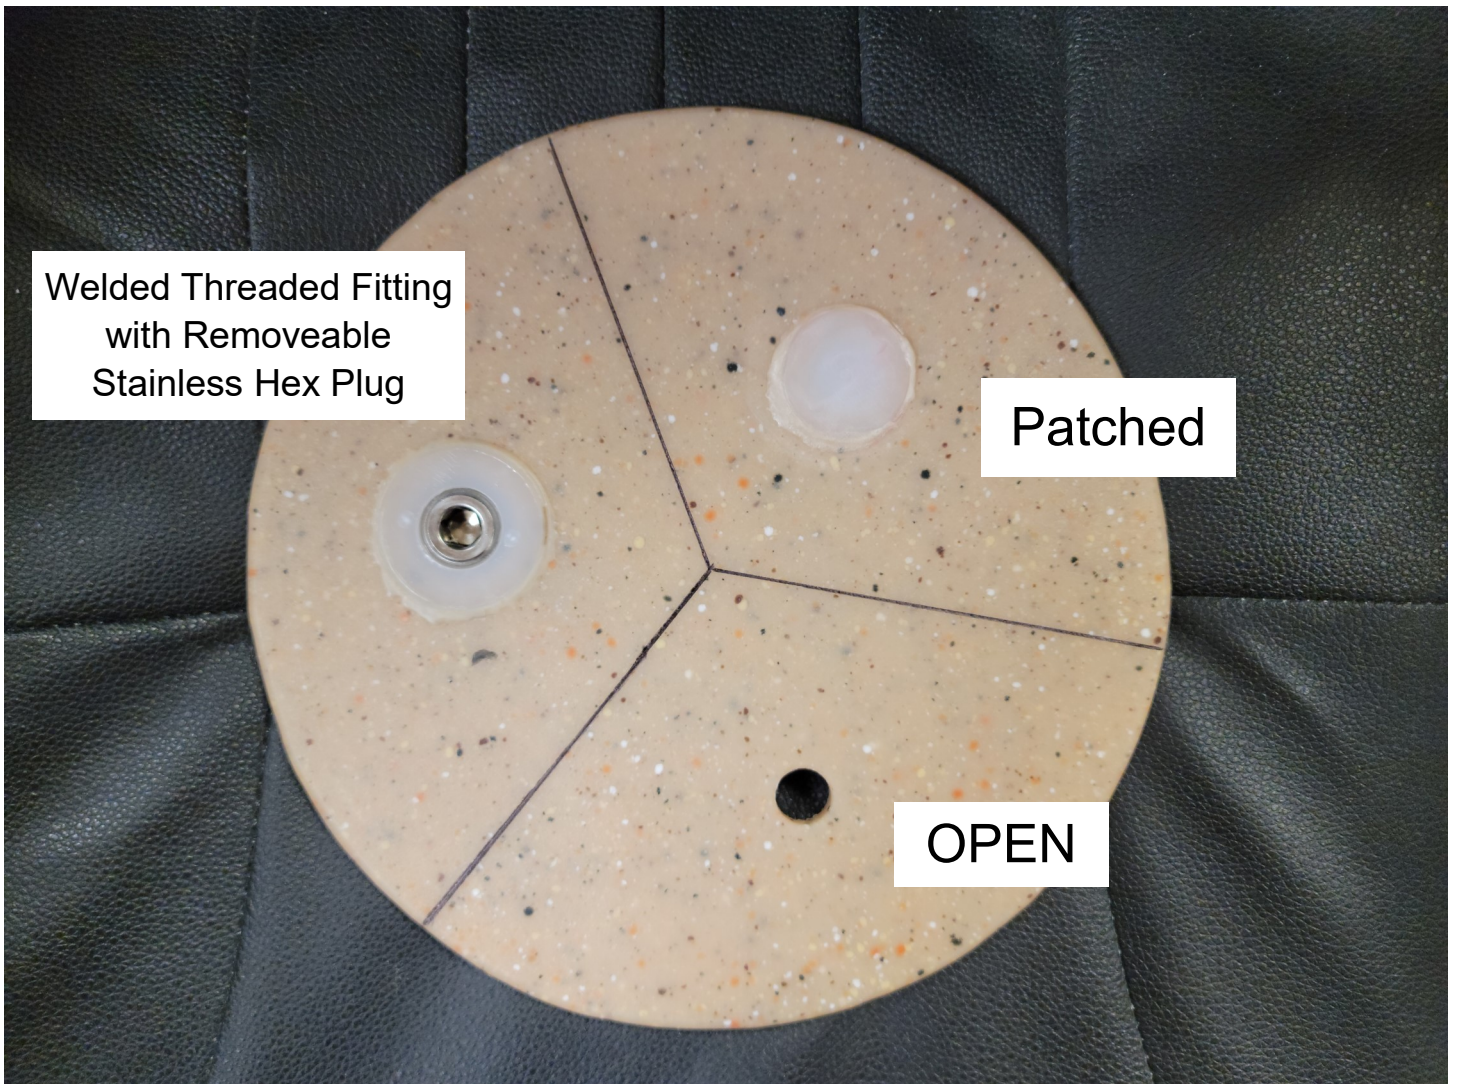